

SE00/1425

4

PA 273052

REC'D 16 JAN 1999  
WIPO POT

SE00/1425

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME;

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

*Handwritten initials*

10/030419

July 17, 2000

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/143,523

FILING DATE: July 13, 1999

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)



By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

*L. Edelen*

L. EDELEN  
Certifying Officer

# PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 C.F.R. § 1.53(c).

Docket  
Number

040030-050

Type a plus sign (+)  
inside this box

+

## INVENTOR(S)/APPLICANT(S)

LAST NAME

FIRST NAME

MIDDLE INITIAL

RESIDENCE (CITY AND EITHER STATE OR FOREIGN  
COUNTRY)

BUTOVITSCH

Peter

Tranebergsvägen 39  
SE-167 45  
BROMMA, SWEDEN

JOHANSSON

Lars

B.

Torpargatan 37  
SE-583 32  
LINKÖPING, SWEDEN

## TITLE OF THE INVENTION (280 characters max)

HOT SPOT WITH TAILORED RANGE FOR EXTRA FREQUENCY TO MINIMIZE INTERFERENCE

## CORRESPONDENCE ADDRESS

Ronald L. Grudziecki  
BURNS, DOANE, SWECKER & MATHIS, L.L.P.  
P.O. Box 1404  
Alexandria,

STATE

Virginia

ZIP CODE

22313-1404

COUNTRY

United States of America

## ENCLOSED APPLICATION PARTS (check all that apply)

- ☒ Specification *Number of Pages* \_\_\_\_\_ ☐ Small Entity Statement  
☒ Drawing(s) *Number of Sheets* \_\_\_\_\_ ☐ Other (specify) \_\_\_\_\_

## METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)

- ☐ A check or money order is enclosed to cover the Provisional filing fees  
☒ The Commissioner is hereby authorized to charge any deficiency  
in filing fees or credit any overpayment to Deposit Account Number  
02-4800. This paper is submitted in triplicate.

PROVISIONAL  
FILING FEE  
AMOUNT(S)

\$ ☐ \$75.00  
\$ ☒ \$150.00

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

- ☒ No.  
☐ Yes, the name of the U.S. Government agency and the Government contract number are:

Respectfully submitted,

SIGNATURE

Date July 13, 1999

TYPED or PRINTED NAME Stephen W. Palan

Registration No. 43,420  
(if appropriate)

- ☒ Additional inventors are being named on separately numbered sheets attached hereto

ADDITIONAL INVENTOR(s)/APPLICANT(s)			
LAST NAME	FIRST NAME	MIDDLE INITIAL	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)
MÜLLER	Walter		Huginvägen 7 SE-194 62 UPPLANDS VASBY, SWEDEN
BLOMBERG	Petter		Agatan 20, S-172 62 SUNDBYBERG, SWEDEN

PATENT

Atty Dkt. No. 040030-050

**HOT SPOT WITH TAILORED RANGE FOR EXTRA FREQUENCY TO  
MINIMIZE INTERFERENCE**

5

**BACKGROUND**

The present invention relates to increasing the capacity of a cellular system, and more specifically, to increasing the capacity of a cell without causing an increased amount of interference to connections in the system.

10

Continuing growth in telecommunications is placing increasing stress on the capacity of cellular systems. The limited frequency spectrum made available for cellular communications demands cellular systems having increased network capacity and adaptability to various communications traffic situations. Although the introduction of digital modulation to cellular systems has increased system capacity, these increases alone may be insufficient to satisfy added demand for capacity and radio coverage. Other measures to increase capacity, such as decreasing the size of cells in metropolitan areas, may be necessary to meet growing demand.

15

Interference between communication cells located near one another creates additional problems, particularly when relatively small cells are utilized. Thus, techniques are necessary for minimizing interference between cells. One known technique used in TDMA and FDMA systems is to group cells into "clusters". Within individual clusters, communications frequencies are allocated to particular cells in a manner which attempts to maximize the uniform distance between cells in different clusters which use the same communications frequencies. This distance is commonly referred to as the "frequency reuse" distance. As this distance

20

25

increases, the interference between a cell using a communication frequency and a distant cell using that same frequency is reduced.

Another method of increasing capacity while reducing interference is through the use of spread spectrum modulation and code division multiple access (CDMA) techniques. In typical direct sequence CDMA systems, an information data stream to be transmitted is superimposed on a much-higher-symbol-rate data stream, sometimes known as a spreading sequence. Each symbol of the spreading sequence is commonly referred to as a chip. Each information signal is allocated a unique spreading code that is used to generate the spreading sequence typically by periodic repetition. The information signal and the spreading sequence are typically combined by multiplication in a process sometimes called coding or spreading the information signal. A plurality of spread information signals are transmitted as modulations of radio frequency carrier waves and are jointly received as a composite signal at a receiver. Each of the spread signals overlaps all of the other coded signals, as well as noise-related signals, in both frequency and time. By correlating the composite signal with one of the unique spreading sequences, the corresponding information signal can be isolated and decoded. Since signals in CDMA systems overlay one another in frequency and time they are frequently said to be self-interfering.

One method of reducing self-interference in a CDMA cellular system is through the use of power control. Power control in cellular systems is based upon the premise that as the distance between the mobile station and the base station decreases, the amount of transmit power needed for the mobile station or the base station to receive an acceptable signal will also decrease. Similarly, as the distance between the base station and the mobile station increases, the amount of transmit power needed for the mobile station or the base station to receive an acceptable signal will also increase. As the magnitude of the transmit power is increased, so to does the amount of interference caused to other connections in the cellular

system. Accordingly, by using only the amount of power necessary to transmit signals between base stations and mobile stations, the amount of interference caused to other connections in the system will be decreased.

Figure 1 illustrates another method used to reduce interference in a CDMA system. Cells A, B and C spread communication signals over a first frequency band  $f_1$ . The cells overlap each other at the shaded regions 140 and 150 so that there are minimal interruptions to an ongoing call during handover. Accordingly, when mobile station 110, which is communicating with a base transceiver station in cell A over frequency band  $f_1$ , moves from an area completely contained within cell A to shaded region 140, the connection between mobile station 110 and cell A will cause interference to connections in cell B, which also are communicating on frequency band  $f_1$ , until handoff occurs to cell B.

Now consider a situation wherein, after the cellular system has been implemented, it is discovered that there is an increased demand for access to the channels allocated to cell B which, in turn, leads to an unacceptable level of interference. The area where the increased demand occurs is referred to in the art as a "hot spot". To reduce the interference associated with a highly loaded cell, a second frequency band  $f_2$  can be assigned to the transmitter in cell B so that the transmitter in cell B can communicate with mobile stations on either frequency band  $f_1$  or on frequency band  $f_2$ . Accordingly, when the system detects an increase in capacity on frequency band  $f_1$ , which the system determines will lead to an unacceptable level of interference, the system can transfer some of the mobile stations over to frequency band  $f_2$ . Typically the determination of whether an increase in capacity will lead to an unacceptable level of interference can be based on a predefined number of users on a particular frequency band or if the total output power used by the system exceeds a predetermined threshold.

For example, assume that cell B is communicating with mobile stations on both frequency band  $f_1$  and frequency band  $f_2$ , and cell A is communicating with

mobile stations only on frequency band  $f_1$ . Assume further that mobile station 110 is communicating on frequency band  $f_1$  with a base station in cell A and that frequency band  $f_1$  in cell B is becoming congested. As the mobile station 110 moves further into the area of coverage of cell B and away from the area of coverage of cell A, the mobile station 110 or the cellular system will determine that mobile station 110's signal quality can be improved if a connection between the mobile station 110 and a base transceiver station in cell B on frequency band  $f_2$  is established. However, before the connection is handed off, mobile station 110 will cause interference to the mobile stations in cell B, since both mobile station 110 and the mobile stations in cell B will be transmitting over the same frequency band, i.e., frequency band  $f_1$ . Accordingly, although congestion is relieved in cell B, interference will still be caused to mobile stations in cell B which are operating on frequency band  $f_1$ .

Another alternative method for increasing system capacity while minimizing interference is through the use of localized microcells which may be established within overlying macrocells to handle areas with relatively dense concentrations of mobile users. Typically, microcells may be established for thoroughfares such as crossroads or streets, and a series of microcells may provide coverage of major traffic arteries such as highways. Microcells may also be assigned to large buildings, airports, and shopping malls. Microcells allow additional communication channels to be located in the vicinity of actual need, thereby increasing cell capacity while maintaining low levels of interference.

Implementation of microcells within a macrocell typically requires the use of separate frequencies for communication on the channels assigned to the microcell and for the channels assigned to the macrocell. Further, implementation of microcells within a macrocell requires separate transmitters, i.e., base transceiver stations, for communications on the channels assigned to the microcell and for channels assigned to the macrocell. These microcell transceivers typically

have lower maximum transmit powers than macrocell transceivers and, accordingly, create relatively less interference through their transmissions. Although the use of microcells may reduce interference, the use of microcells also increases the cost of providing the additional channels by requiring the installation of additional transmitters and through increased costs of cell planning due to the complexity which results from the use of microcells. Further, since the transceivers for a microcell are not usually located in the same geographic area as the transceivers for the macrocells, there are increased maintenance costs associated with the geographic separation. In addition, although microcells may reduce the load on the macrocell and reduce the average power levels used by the mobile stations in the microcell, the microcell may also have to tolerate high levels of interference.

Accordingly, it would be desirable to increase the capacity of a cellular communications system without increasing excess interference to the existing connections in the cellular system. Further, it would be desirable to increase capacity in a cellular system without adding extra base transceiver stations and the associated added expenses. In addition, it would be desirable to allow a handoff into a cell with increased capacity which does not cause excess interference towards the existing connections in the cell.

#### SUMMARY

These and other problems associated with cellular communications are solved by the present invention, wherein a base transceiver station which communicates with mobile stations over a first and second frequency band uses a tailored range for the second frequency band in order to minimize interference.

According to one embodiment of the present invention, the maximum range for the second frequency band is smaller than the maximum range for the first frequency band. According to another embodiment of the present invention, the maximum range for the second frequency band is greater than the maximum range for the



first frequency band. According to yet another embodiment of the present invention, the maximum range of the second frequency band will vary depending upon the congestion of the first frequency band.

### BRIEF DESCRIPTION OF THE DRAWINGS

5       The present invention will now be described with reference to the accompanying drawings in which:

Figure 1 illustrates a cellular system including three cells where one cell uses two frequency bands;

10       Figure 2 illustrates a cellular system where one cell uses a second frequency band with an extended maximum range;

Figure 3 illustrates a cellular system where one cell uses a second frequency band with a reduced maximum range;

Figure 4 illustrates a cellular system where all three cells use a second frequency band with a reduced maximum range;

15       Figures 5A-5D illustrate a cellular system where the second frequency band has a maximum range which is a function of the capacity of the first frequency band and of the interference on the first frequency band;

Figure 6 illustrates an exemplary method for varying the maximum range of the second frequency band;

20       Figure 7 illustrates a cellular system where one cell has a second frequency band with a reduced maximum range and two cells have a second frequency band with an extended maximum range;

Figures 8A-8C illustrate exemplary embodiments of the present invention in a sectorized cell; and

25       Figure 9 illustrates a first frequency band which is sectorized and a second frequency band which is omnidirectional.

## DETAILED DESCRIPTION

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, circuit components, techniques, etc. in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, and circuits are omitted so as not to obscure the description of the present invention.

In order to simplify the discussion of the present invention, the maximum range of frequency band  $f_1$  will hereinafter be referred to as either the area of coverage of a cell, the cell boundary or, simply, the cell. Further, one skilled in the art will recognize that the maximum range of a frequency band, i.e., a base transceiver station's transmission on the frequency band, is the farthest distance where the mobile station can receive a signal which has a signal strength or quality above a predetermined threshold.

Although the following describes certain measurements and calculations being performed by a mobile station, one skilled in the art will recognize that the measurements and calculations can alternatively be performed in the cellular network. Further, although the following describes certain calculations being performed in the base transceiver station, one skilled in the art will recognize that these calculations may be performed in other parts of the cellular network, e.g., the radio network controller.

Figure 2 illustrates a first exemplary embodiment of the present invention wherein the base transceiver station (not shown) uses a second frequency band  $f_2$  which has a maximum range which is greater than the maximum range of frequency band  $f_1$  transmitted by the base transceiver station in cell B, i.e., the maximum transmit power of the base transceiver station in cell B on frequency

band  $f_2$  is greater than the maximum transmit power of the base transceiver station in cell B on frequency band  $f_1$ . Accordingly, the extended range frequency band  $f_2$  is illustrated in figure 2 as extending into cells A and C. The extended range of frequency band  $f_2$  will not significantly interfere with connections in cells A and C because those cells are using frequency band  $f_1$  for their connections. Further, the extended range of frequency band  $f_2$  allows for less interference to other connections during handoff. For example, if mobile station 110 is moving from cell A towards cell B, the mobile station 110, while communicating on frequency band  $f_1$  in cell A, can handover to frequency band  $f_2$  in cell B without having to come close enough to cell B to cause significant interference with frequency band  $f_1$  in cell B.

Another advantage of the extended range hot spot is evident when the mobile station 110 is leaving cell B while communicating on a connection on frequency band  $f_2$ . Since frequency band  $f_2$  extends into cell A the mobile station does not have to handoff to frequency band  $f_1$  of cell A until the mobile station 110 is located in cell A. Accordingly, since the mobile station 110 has a connection on frequency band  $f_2$ , it will not cause significant interference to connections in cell A which are using frequency band  $f_1$ .

Prior to discussing additional exemplary handoff procedures according to the present invention, conventional handoff procedures are described below. In certain conventional CDMA systems control information is broadcast to mobile stations over a control channel or pilot channel which is known in the art as a Perch channel or a Primary Common Control Physical Channel (CCPCH). For more information regarding Perch channels the interested reader should refer to U.S. Patent Application No. 09/112,689 entitled "Method, Apparatus, and System for Fast Base Station Synchronization and Sector Identification" filed July 9, 1998, which is herein incorporated by reference. For ease of explanation the control channel will be herein referred to as the Perch channel. A logical Broadcast

Control Channel (BCCH) is mapped, for example, to the information symbols in the Perch channel. The BCCH delivers cell-specific information, e.g., cell identification and sector identification, system-related information, e.g., transmit power, uplink interference power, and cell specific neighboring cell information, e.g., long codes used by neighboring cells, neighboring cells which mobile stations should make measurements upon, etc. In order for a mobile station to identify other base transceiver stations to handoff to, the mobile station identifies the Perch channels for the surrounding base transceiver stations using the long codes supplied as described above. Using these long codes the mobile station can make continuous measurements of the Perch channels associated with neighboring cells to identify potential base transceiver stations as handoff candidates.

In conventional CDMA systems when a mobile station is communicating using real time services such as speech, the mobile station is continuously transmitting and receiving. Accordingly, in typical CDMA systems a mobile station cannot make measurements on other frequencies without a second receiver. However, a second receiver adds to the weight and complexity of the mobile station. One proposed solution which allows a mobile station to make measurements on another frequency is to vary the duty cycle of transmissions to operate in a so-called "compressed mode". In the compressed mode the information in the traffic channel is compressed in time and sent in one or more shorter bursts than normal. Since the information on the traffic channel is received in less time, the mobile station can use the extra time to make measurements on other frequencies. However, using less time for the same amount of information means that a higher transmission rate must be used. The higher transmission rate leads to an increase in the amount of power used, and in turn, a greater amount of interference. Accordingly, it would be desirable to be able to make measurements on Perch channels transmitted on other frequencies without an additional receiver and without using the compressed mode.

According to the present invention the Perch channel for the second frequency band  $f_2$  (Perch channel 2) can be transmitted on frequency band  $f_1$ . For example, referring again to figure 2, Perch channel 2 can, in addition to being transmitted on frequency band  $f_2$ , be transmitted on frequency band  $f_1$  using the long code of frequency band  $f_1$ , but employing a different channelization code than the channelization code used to transmit the Perch channel for frequency band  $f_1$  (Perch channel 1) in cell B. The base transceiver station can inform the mobile station via the BCCH of the channelization code for Perch channel 2 which is being transmitted on frequency band  $f_1$ . Similarly, Perch channel 1 for frequency band  $f_1$  can be transmitted on frequency band  $f_2$  using the same long code used to transmit on frequency band  $f_2$  but employing a different channelization code than the channelization code used to transmit Perch channel 2 on frequency band  $f_2$ . Accordingly, a mobile station while communicating on a first frequency band is able to make measurements on Perch channels which are associated with other frequency bands.

Another method for determining whether the second frequency band  $f_2$  has an acceptable signal quality for a connection between a particular mobile station and base transceiver station can be referred to as the offset method. According to this method the mobile station, or the base transceiver station if the handoff decisions are made therein, is informed of the power level offset between the Perch channel 1 transmitted on frequency band  $f_1$  and the Perch channel 2 on frequency band  $f_2$ . Since the mobile station is already measuring the Perch channel 1 on frequency band  $f_1$ , the determination of whether the frequency band  $f_2$  provides an acceptable signal quality can take into account this power level offset. For example, handoff decisions are typically based upon pathloss to the base transceiver station by subtracting the received Perch channel power from the power at which the Perch channel was transmitted from the base transceiver station. One skilled in the art will recognize that handoff decisions can also be

based upon other parameters such as signal-to-noise ratio, received signal strength indicator (RSSI), delay, bit error rate (BER), frame error rate, (FER), or any combination of these parameters.

Accordingly, referring again to figure 2, mobile station 110 will measure  
5 the received power of Perch channel 1. When the mobile station 110 is measuring Perch channel 1 on frequency band  $f_1$  in cell B, the Perch channel can inform the mobile station 110 of the transmitted power of frequency band  $f_1$  and the power offset between frequency band  $f_1$  and frequency band  $f_2$  in cell B. The mobile station 110 then calculates the pathloss between for frequency band  $f_1$ . The mobile  
10 station 110 can estimate the pathloss for frequency band  $f_2$  by adding or subtracting the offset value from the pathloss which the mobile station 110 determined for frequency band  $f_1$  in cell B. A mobile station will decide to handoff from frequency band  $f_1$  to frequency band  $f_2$  when the pathloss measured on Perch channel 1 has decreased below a certain threshold. Similarly, a mobile station will  
15 handoff from frequency band  $f_2$  to frequency band  $f_1$  when the pathloss measured on Perch channel 2 sent on frequency band  $f_2$  has increased above a certain threshold. One skilled in the art will readily recognize that similar thresholds can be implemented if the handoff decisions are based on RSSI or SIR.

Figure 3 illustrates another exemplary embodiment of the present invention  
20 wherein the base transceiver station in cell B communicates over a frequency band  $f_2$  which has a maximum range which is smaller than the maximum range of frequency band  $f_1$ , i.e., wherein the maximum transmit power for the base transceiver station on frequency band  $f_2$  is less than the maximum transmit power of the base transceiver station on frequency band  $f_1$ . Alternatively, the maximum  
25 range of frequency bands  $f_1$  and  $f_2$  can be adjusted by changing the threshold for handing a mobile station over from one base transceiver station to another. According to a purely exemplary embodiment of the present invention, the maximum range of frequency band  $f_2$  is set such that the border of frequency band

$f_2$  does not extend into overlap areas 140 and 150. Since the maximum range of frequency band  $f_2$  does not extend into overlap areas 140 and 150, a mobile station which has a connection on frequency band  $f_2$  in cell B can switch over to frequency band  $f_1$  in cell B without significantly interfering with connections on frequency band  $f_1$  of cell A, because when the mobile station switches from one frequency band to the other frequency band the mobile station will not be close enough to the boundaries of cell A to cause significant interference. In contrast, in conventional systems where frequency bands  $f_1$  and  $f_2$  have the same maximum range, the mobile station could switch from frequency band  $f_2$  in cell B to frequency band  $f_1$  in cell B while in overlap area 140 and the mobile station would then transmit on frequency band  $f_1$  in cell B and cause interference to co-channel (code) users of frequency band  $f_1$  in cell A.

Assume now that mobile station 110 is communicating on frequency band  $f_2$  with a base transceiver station in cell B. The mobile station 110 can determine that if the pathloss estimate goes above, for example, 71dB, the mobile station 110 will handoff to frequency band  $f_1$ , because frequency band  $f_1$  has a lower pathloss value. Further, if the mobile station 110 is communicating on frequency band  $f_1$  and the pathloss estimate falls below, for example, 69dB the mobile station 110 will handoff to frequency band  $f_2$  in cell B because it is possible for mobile station 110 to use a lower signal power while maintaining the same signal quality. One skilled in the art will recognize that this exemplary 2dB difference between the handoff thresholds, known as hysteresis, avoids the ping-pong effect of the mobile station 110 performing continuous handoffs to achieve minimal increased signal reception. If the base transceiver station performs the handoff calculations then the base transceiver station will determine whether the pathloss estimate exceeds the thresholds described above. In addition, although the example above uses only two frequency bands, one skilled in the art will recognize that the thresholds

described above are equally applicable to systems with more than two frequency bands.

Accordingly, the thresholds described above will have the effect that a majority of the mobile stations which are located within the range of the smaller "cell" will be communicating on frequency band  $f_2$ , while all other mobile stations which are communicating with the base transceiver station in cell B will be communicating on frequency band  $f_1$ . Further, if the system is making the handoff determinations, the system can group mobile stations which are within the range of frequency band  $f_2$  and communicating on frequency band  $f_1$  into a set of handoff candidates. The actual handoff is triggered by the load or amount of interference on frequency band  $f_1$  and the base transceiver station orders mobile stations in the handoff candidate group to handoff to frequency band  $f_2$ . Other criteria for selecting mobile stations which should handoff to frequency band  $f_2$  when interference begins to affect communication on frequency band  $f_1$  include choosing mobile stations which are moving with the lowest speed as candidates for frequency band  $f_2$ , choosing mobile stations which are closest to the base transceiver station as candidates for frequency band  $f_2$ , choosing mobile stations which are moving towards the base transceiver station as candidates for frequency band  $f_2$ , choosing mobile stations based upon time spent in the cell, or a combination of any of the criteria described above.

An additional advantage to the use of a reduced maximum range for the second frequency band  $f_2$  is the increased capacity and flexibility over conventional systems which use only a single frequency band. For instance, a system can have enough mobiles in communication on the second frequency band  $f_2$  such that resources on the first frequency band  $f_1$  can be reserved to provide more robust communications and can better handle situations such as when a fast moving mobile station suddenly enters the cell.



The limited range for a second frequency band shown in figure 3 can be extended such that more than one or all of the cells in a communications system use a second frequency band  $f_2$  which has a limited range, as illustrated in figure 4. Accordingly, the second frequency band  $f_2$  in cells A, B and C have a maximum  
5 range set such that none of the frequency bands provide coverage of overlap areas 140 and 150. Since none of the second frequency bands overlap, the second frequency bands do not cause interference towards each other. Accordingly, the configuration of figure 4 allows all of the cells to have the advantages described above without additional interference between the second frequency bands  $f_2$  in  
10 each cell.

Further, one skilled in the art will recognize that depending upon various radio communication conditions, e.g., radio wave propagation, line of sight conditions, some overlap between the second frequency bands  $f_2$  in cells A, B and C may occur. If such an overlap exists when a mobile station is moving between  
15 cells, the system should handoff the mobile station from one of the cell's frequency band  $f_2$  to another one of the cell's frequency band  $f_2$ . For example, referring again to figure 4, assume that a mobile station is moving from the center of cell B towards cell A and is communicating on frequency band  $f_2$  with the base transceiver station in cell B. Further, assume that due to the radio  
20 communication conditions there exists some overlap between the maximum range of the frequency band  $f_2$  in cell B and the maximum range of the frequency band  $f_2$  in cell A. Since it is generally preferable to perform soft handoff rather than a hard handoff, the mobile station will handoff from frequency band  $f_2$  in cell B to frequency band  $f_2$  in cell A if it is determined that the frequency band  $f_2$  in cell A provides the mobile station with an acceptable quality signal.  
25

Figures 5A-5D illustrate another exemplary embodiment of the present invention where the maximum range of frequency band  $f_2$  varies as a function of the current or anticipated capacity available on frequency band  $f_1$  and the amount

of interference in frequency band  $f_1$ . Accordingly, if there is no need for an additional frequency band, e.g., when frequency band  $f_1$  has enough capacity for all current connections, frequency band  $f_2$  is not used, as illustrated in figure 5A. The system determines whether there is sufficient capacity on frequency band  $f_1$  by  
5 evaluating the amount of interference in frequency band  $f_1$  and the number of current connections on frequency band  $f_1$ , reserving a portion of the maximum capacity so that there is enough capacity for mobile stations to handoff to frequency band  $f_1$ . As the loading on frequency band  $f_1$  increases, and in turn, the interference caused to mobiles operating on the frequency band increases, the base  
10 transceiver station activates frequency band  $f_2$  and sets the maximum power of frequency band  $f_2$  to a minimum power level as illustrated in figure 5B. The minimum power level is chosen such that there is enough area in the cell for mobile stations which are communicating on frequency band  $f_2$  to move around without having to immediately handoff back to frequency band  $f_1$ . Since frequency  
15 band  $f_2$  is designed to relieve the load and interference on frequency band  $f_1$ , the minimum power level is set to a level where the interference in frequency band  $f_1$  is lowered and such that frequency band  $f_1$  has sufficient capacity to handle mobile stations which attempt to handoff to frequency band  $f_1$ .

As the number of mobiles operating in cell B increases further, the  
20 maximum range of frequency band  $f_2$  can be increased, as illustrated in figures 5C and 5D. This increase can be gradual or in predetermined steps. Similarly, as the demand for capacity decreases in cell B, the maximum range of frequency band  $f_2$  will shrink. Since inter-frequency handover causes more disturbance to a call than soft handover, it is desirable to allow as many mobiles as possible to remain  
25 connected on frequency band  $f_1$  while frequency band  $f_2$  is expanding and contracting.

Figure 6 illustrates an exemplary method for varying the maximum range of frequency band  $f_2$ . In step 610, the capacity of, and the interference on,

frequency band  $f_1$  is checked. In step 615 it is determined whether the current capacity of frequency band  $f_1$  is sufficient given the number of connections which are established and whether the level of interference on frequency band  $f_1$  is at an acceptable level. The determination of sufficient capacity of frequency band  $f_1$  includes a margin so that there is sufficient excess capacity for mobile stations which subsequently enter cell B to communicate across frequency band  $f_1$ . If the capacity is not sufficient or if there is an unacceptable level of interference in frequency band  $f_1$ , in accordance with the "No" path out of decision step 615, then the maximum range of frequency band  $f_2$  is increased in accordance with step 620. According to a purely exemplary embodiment of the present invention, an increase in the maximum range of frequency band  $f_2$  is illustrated by changing frequency band  $f_2$  from the maximum range in figure 5C to the maximum range in figure 5D. If frequency band  $f_2$  is not currently being used by the base transceiver station in cell B, then in step 620 frequency band  $f_2$  is activated and set to a predetermined minimum maximum range, as illustrated by moving from figure 5A to figure 5B. After the maximum range of frequency band  $f_2$  has been increased, then the system returns to step 610 to check the capacity of frequency band  $f_1$ .

If the capacity of frequency band  $f_1$  is sufficient and the level of interference in frequency band  $f_1$  is acceptable, in accordance with the "Yes" path out of decision step 615, then it is determined whether there is excess capacity on frequency band  $f_1$  in accordance with step 625. If there is excess capacity on frequency band  $f_1$ , e.g., if there are some predetermined number of channels not currently in use on band  $f_1$ , in accordance with the "Yes" path out of decision step 625, then the maximum range of frequency band  $f_2$  is decreased in accordance with step 630. The determination of excess capacity should also account for a number of connections for mobile stations which may handoff to frequency band  $f_1$ . According to a purely exemplary embodiment of the present invention, the decrease in the maximum range of frequency band  $f_2$  is illustrated by changing

frequency band  $f_2$  from the maximum range in figure 5C to the minimum range in figure 5B. If frequency band  $f_2$  is already set to a minimum output transmit power when it is determined that there is excess capacity on frequency band  $f_1$  and there are no mobile stations using frequency band  $f_2$ , then the base transceiver station  
5 can opt to cease using the frequency band  $f_2$ , as illustrated by moving from figure 5B to figure 5A. After the maximum range of frequency band  $f_2$  has been decreased, the system returns to step 610 to check the capacity of, and interference on, frequency band  $f_1$ . Similarly, if it is determined that there is not excess capacity on frequency band  $f_1$ , in accordance with the "No" path out of decision  
10 step 625, then the system returns to step 610 to check the capacity of, and amount of interference on, frequency band  $f_1$ .

Figure 7 illustrates another exemplary embodiment of the present invention in which the techniques described in regard to figures 2 and 3 are used by neighboring cells. Accordingly, cells A and C use an extended range for  
15 frequency band  $f_2$ , where the maximum range of frequency band  $f_2$  extends into cell B. Cell B uses a reduced range for frequency band  $f_2$ , where the maximum range of frequency band  $f_2$  does not extend into overlap areas 140 and 150. The embodiment illustrated in figure 7 provides slightly different locations where handover can be performed for frequency band  $f_1$  and for frequency band  $f_2$ . This  
20 combination of extended and limited range for frequency band  $f_2$  can be used to host high data-rate users which normally reside close to the site (provided by the smaller  $f_2$  cell). By providing the extended range frequency band  $f_2$  in cells A and C, these high data-rate users can leave cell B without causing any disturbance to connections on frequency band  $f_1$ .

25 Although the present invention has been described with reference to single sector cells, the present invention is equally applicable to multisector cells such as those shown in figures 8A-8C. Figure 8A illustrates an exemplary three sector cell serviced by three sector antennas (not shown) in a CDMA system where each

sector operates using a first frequency band  $f_1$ . Although the sectors are illustrated as having definite cell boundaries, one skilled in the art will recognize that there will be an overlap in the area of coverage between each sector in order to provide handover with minimal interruption to an ongoing call. Figure 8B illustrates an exemplary three sector cell where a second frequency band  $f_2$  has a reduced maximum range in sector 1. The maximum range of frequency band  $f_2$  in figure 8B is set such that frequency band  $f_2$  does not extend into the areas of coverage of sectors 2 and 3, including any overlap areas which are not shown. The embodiment illustrated in figure 8B offers advantages similar to those offered by the reduced maximum range embodiment illustrated in figure 3. Further, similar to figure 4, each sector of figure 8B can use a frequency band  $f_2$  with the reduced maximum range where each sector can obtain the benefits offered by the reduced second frequency band.

Figure 8C illustrates an extended frequency band  $f_2$  which originates from the antenna and transmitter responsible for broadcasting frequency band  $f_1$  in sector 1, but frequency band  $f_2$  has a maximum range which overlaps into sectors 2 and 3. The extended range second frequency band  $f_2$  in a sectorized cell offers advantages similar to the extended range frequency band  $f_2$  illustrated in figure 2 in a single sector cell. In addition, the "controlled breathing" embodiment of the present invention which was described above in figures 5A-5D in regard to a single sector cell can be implemented in a multisector cell. For more information regarding sectorized cells, antennas and transmitter arrangements for sectorized cells, the interested reader is referred to U.S. Patent Application No. 09/053,951 "Method and System for Handling Radio Signals in a Radio Base Station", the disclosure of which is expressly incorporated here by reference.

In sectorized cells a mobile station can communicate with several sectors on frequency band  $f_1$  using a technique known as softer handoff. For more information regarding sectorized cells and softer handoff the interested reader

should refer to U.S. Patent Application No. 09/112,689 entitled "Method, Apparatus, and System for Fast Base Station Synchronization and Sector Identification" filed July 9, 1998, which is herein incorporated by reference.

When the mobile station is communicating with several sectors on frequency band  $f_1$  the pathloss to the base transceiver station can be estimated by using the lowest pathloss among all sectors in the cell that the mobile station is communicating with. This technique can avoid the afore described "ping-pong" effect when a mobile station is moving from, for example in figure 8B, frequency band  $f_2$  to frequency band  $f_1$  because the handoff decision may be based on a path with many reflections. These reflections are the result of the base transceiver station signals bouncing off objects, such as buildings, before reach the mobile station which can result in a pathloss value which is higher than the pathloss value should be based upon the distance of the mobile from the base transceiver station. Since interfrequency handoff can result in greater disturbances and a greater likelihood of dropped call than intrafrequency handoff, while a mobile station is communicating on frequency band  $f_2$  handoff to frequency band  $f_1$  should be avoided as long as one sector is good enough to maintain the communication.

Figure 9 illustrates a cell with three sectors for carrying frequency band  $f_1$ , while frequency band  $f_2$  is transmitted using an omnidirectional transmission scheme. According to this embodiment mobile stations which are communicating on frequency band  $f_2$  can move around the base transceiver station without having to perform a soft handoff. The omnidirectional second frequency band  $f_2$  leads to less load on the network due to less signaling, especially when a mobile station is moving close to the center of the cell. In addition, the omnidirectional second frequency band  $f_2$  allows for a less complex power control scheme to be used, which can lead to the need for less resources.

The present invention has been described by way of exemplary embodiments to which the invention is not limited. Modifications and changes will

occur to those skilled in the art without departing from the spirit and scope of the invention as defined in the appended claims.

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

**WHAT IS CLAIMED IS:**

1. A cellular communication system comprising:  
a base transceiver station which transmits signals across a first frequency band with a first maximum range and across a second frequency band with a  
5 second maximum range, wherein the first and second maximum ranges overlap and wherein the second maximum range is larger than the first maximum range.
2. The cellular communication system of claim 1, wherein the first maximum range defines the boundaries of a first cell.
3. The cellular communication system of claim 1, wherein the first maximum  
10 range defines the boundaries of one sector in a multisector cell.
4. The cellular communication system of claim 1, wherein the second maximum range overlaps a maximum range associated with the first frequency band transmitted from other base transceiver stations.
5. The cellular communication system of claim 1, wherein said signals are  
15 transmitted in accordance with a code division multiple access scheme (CDMA).
6. The cellular communication system of claim 1, wherein said base transceiver station transmits a control channel for the second frequency band on the first frequency band.
7. The cellular communication system of claim 1, further comprising:  
20 a mobile station, wherein the base transceiver station transmits information regarding the first frequency band and the second frequency band to the mobile



station and the mobile station calculates an offset value based on said transmitted information.

8. The cellular communication system of claim 1, wherein the system calculates an offset value as a function of the difference in power levels between the first frequency band and the second frequency band.
9. The cellular communication system of claim 8 wherein the system calculates a pathloss estimate for the control channel for the second frequency band on the first frequency band.
10. The cellular communication system of claim 6, further comprising:  
a mobile station, wherein the mobile station calculates a pathloss estimate for the control channel for the second frequency band on the first frequency band.
11. The cellular communication system of claim 8, further comprising:  
a mobile station, wherein the mobile station calculates the pathloss estimate using the offset value.
12. The cellular communication system of claim 1, wherein the first frequency band and the second frequency band each comprise a plurality of frequencies.
13. The cellular communication system of claim 12, wherein the plurality of frequencies in the first frequency band are exclusive of the plurality of frequencies in the second frequency band.
14. A cellular communication system comprising:

a base transceiver station which transmits signals across a first frequency band with a first maximum range and across a second frequency band with a second maximum range, wherein the first and second maximum ranges overlap and wherein the second maximum range is smaller than the first maximum range.

- 5      15.    The cellular communication system of claim 14 further comprising:  
         another base transceiver station which transmits signals across the first  
         frequency band with the first maximum range and across the second frequency  
         band with the second maximum range, wherein the first and second maximum  
10       ranges overlap and wherein the second maximum range is smaller than the first  
         maximum range.
16.    The cellular communications system of claim 14, wherein an area of  
         coverage associated with the second maximum range does not overlap areas of  
         coverage from frequency bands associated with other base transceiver stations.
- 15       17.    The cellular communication system of claim 14, wherein the first maximum  
         range defines the boundaries of a first cell.
18.    The cellular communication system of claim 14, wherein the first maximum  
         range defines the boundaries of one sector in a multisector cell.
19.    The cellular communication system of claim 14, wherein said signals are  
         transmitted in accordance with a code division multiple access (CDMA) scheme.
- 20       20.    The cellular communication system of claim 14, wherein said base  
         transceiver station transmits a control channel for the second frequency band on  
         the first frequency band.

21. The cellular communication system of claim 14, wherein the base transceiver station calculates an offset value as a function of the difference in power levels between the first frequency band and the second frequency band.
- 5 22. The cellular communication system of claim 20, further comprising:  
a mobile station, wherein the mobile station calculates a pathloss estimate for the control channel for the second frequency band on the first frequency band.
23. The cellular communication system of claim 21, further comprising:  
a mobile station, wherein the mobile station calculates a pathloss estimate using the offset value.
- 10 24. The cellular communication system of claim 14, wherein the first frequency band and the second frequency band each comprise a plurality of frequencies.
25. The cellular communication system of claim 24, wherein the plurality of frequencies in the first frequency band are exclusive of the plurality of frequencies in the second frequency band.
- 15 26. A base transceiver station comprising:  
means for transmitting signals across a first frequency band with a first maximum range; and  
means for transmitting signals across a second frequency band with a second maximum range;
- 20 wherein the maximum range of said second frequency band varies based on the capacity of the first frequency band.

27. The base transceiver station of claim 26, wherein said base transceiver station does not transmit over said second frequency band if said first frequency band has sufficient capacity.

5 28. The base transceiver station of claim 27, wherein the first frequency band has sufficient capacity when additional connections on the first frequency band do not cause excessive interference to existing connections on the first frequency band.

29. The base transceiver station of claim 26, wherein the signals are transmitted in accordance with a code division multiple access (CDMA) scheme.

10 30. The base transceiver station of claim 26, wherein the maximum range of the second frequency band also varies based upon the location of mobile stations.

31. In a base transceiver station, a method for minimizing interference comprising the steps of:

15 transmitting signals across a first frequency band with a first maximum range; and

transmitting signals across a second frequency band with a second maximum range;

wherein the maximum range of said second frequency band varies based on the capacity of the first frequency band.

20 32. The method of claim 31, wherein said base transceiver station does not transmit over said second frequency band if said first frequency band has sufficient capacity.

33. The method of claim 32, wherein the first frequency band has sufficient capacity when additional connections on the first frequency band do not cause excessive interference to existing connections on the first frequency band.

5 34. The method of claim 31, wherein said maximum range of the second frequency band also varies based upon the location of mobile stations.

35. A method for minimizing interference in a wireless communication system comprising the steps of:

transmitting signals across a first frequency band with a first maximum range;

10 transmitting signals across a second frequency band with a second maximum range;

instructing mobile stations to handoff from one frequency band to the other frequency band based upon a predetermined criteria;

wherein the maximum range of the second frequency band varies.

15 36. The method of claim 35, wherein said predetermined criteria is the speed at which a mobile station is traveling.

37. The method of claim 35, wherein said predetermined criteria is the proximity of a mobile station to a base transceiver station which transmits the first and second frequency bands.

20 38. The method of claim 35, wherein said predetermined criteria is the direction which a mobile station is traveling.

39. A method for handing off a mobile station from a first frequency band to a second frequency band comprising the steps of:

transmitting a first control channel for the second frequency band over the first frequency band;

5 informing the mobile station that said first control channel is being transmitted on said first frequency band;

measuring said first control channel for a predetermined criteria;

10 transmitting and receiving in said mobile station over said second frequency band if said predetermined criteria of said first control channel exceeds a threshold value.

40. The method of claim 39 further comprising the steps of:

15 transmitting a second control channel for the second frequency band over the second frequency band, wherein said first control channel for the second frequency band and the second control channel for the second frequency band contain substantially identical information;

receiving in said mobile station information in said second control channel on said second frequency band.

41. A method for handing off a mobile station from a first frequency band to a second frequency band comprising the steps of:

20 measuring a control channel on said first frequency band;

determining an offset value between said first frequency band and said second frequency band;

25 sending and receiving information, from said mobile station, over said second frequency band if it is determined that the second frequency band meets a predetermined threshold.

42. The method for handing off of claim 41 wherein said offset value is a difference between the transmitted power level of the control channel on said first frequency band and a control channel transmitted on said second frequency band.

### ABSTRACT OF THE DISCLOSURE

A method and apparatus for minimizing interference in a wireless communication system. A base transceiver station transmits and receives over a first frequency band and a second frequency band. The maximum range of the first frequency band can be smaller than the maximum range of the second frequency band. Alternatively, the maximum range of the first frequency band can be larger than the maximum range of the second frequency band. Further, the maximum range of the second frequency band can vary based upon factors such as the capacity of the first frequency band and the amount of interference on the first frequency band. A control channel for the second frequency band which is measured for determining whether to handoff from the first frequency band to the second frequency band can be transmitted within the first frequency band. Alternatively, handoff can be determined using a power level offset between the first frequency band and the second frequency band.



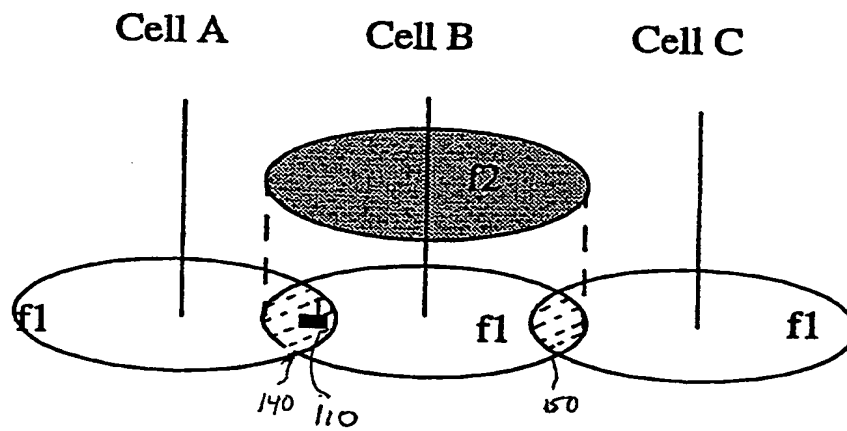


FIG 1

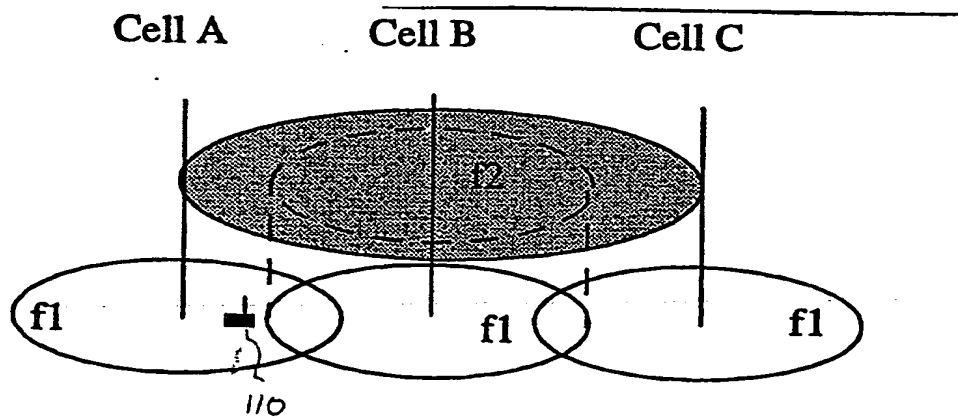


FIG 2

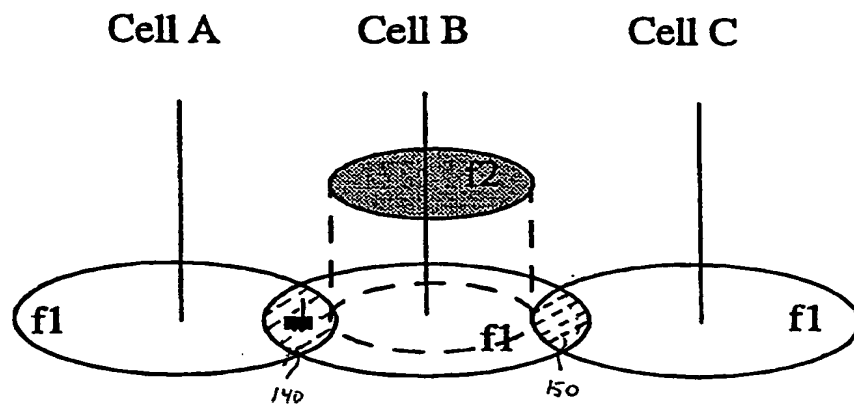


FIG 3

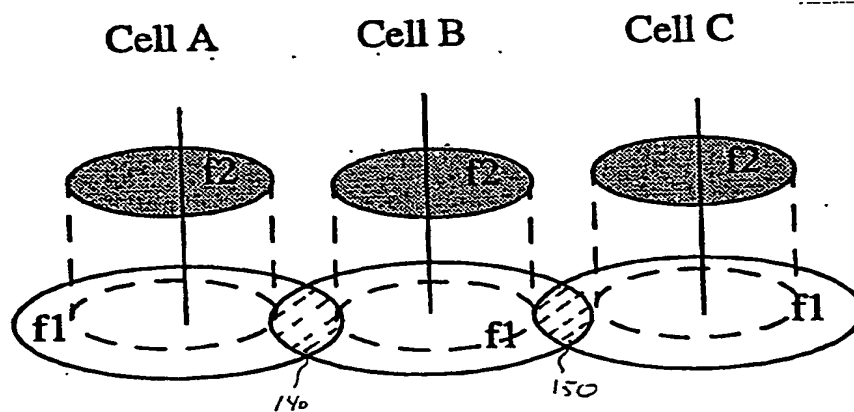


FIG 4

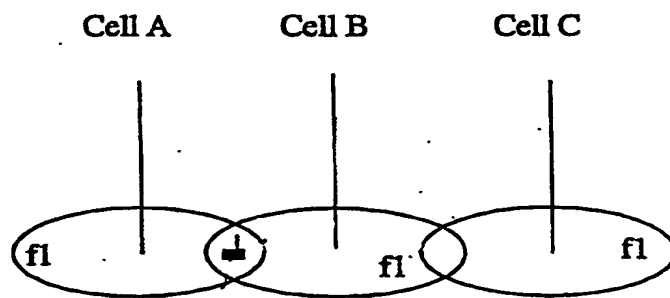


Figure 5 A

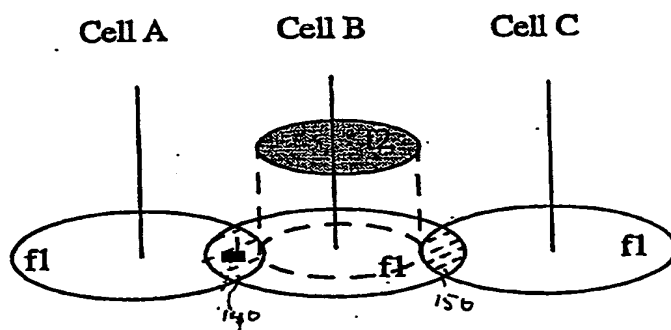


Figure 5 B

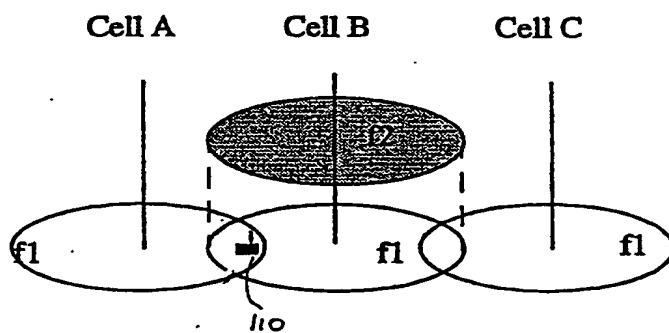


Figure 5 C

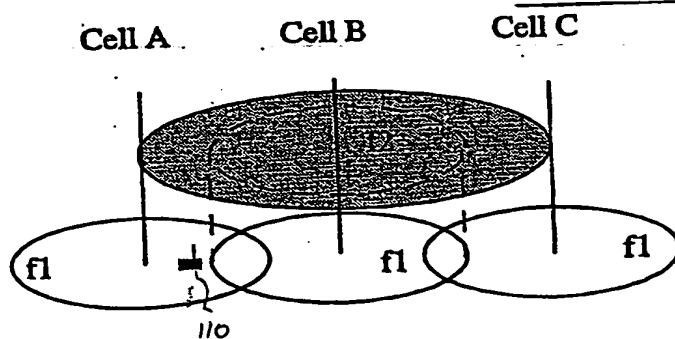


Figure 5 D

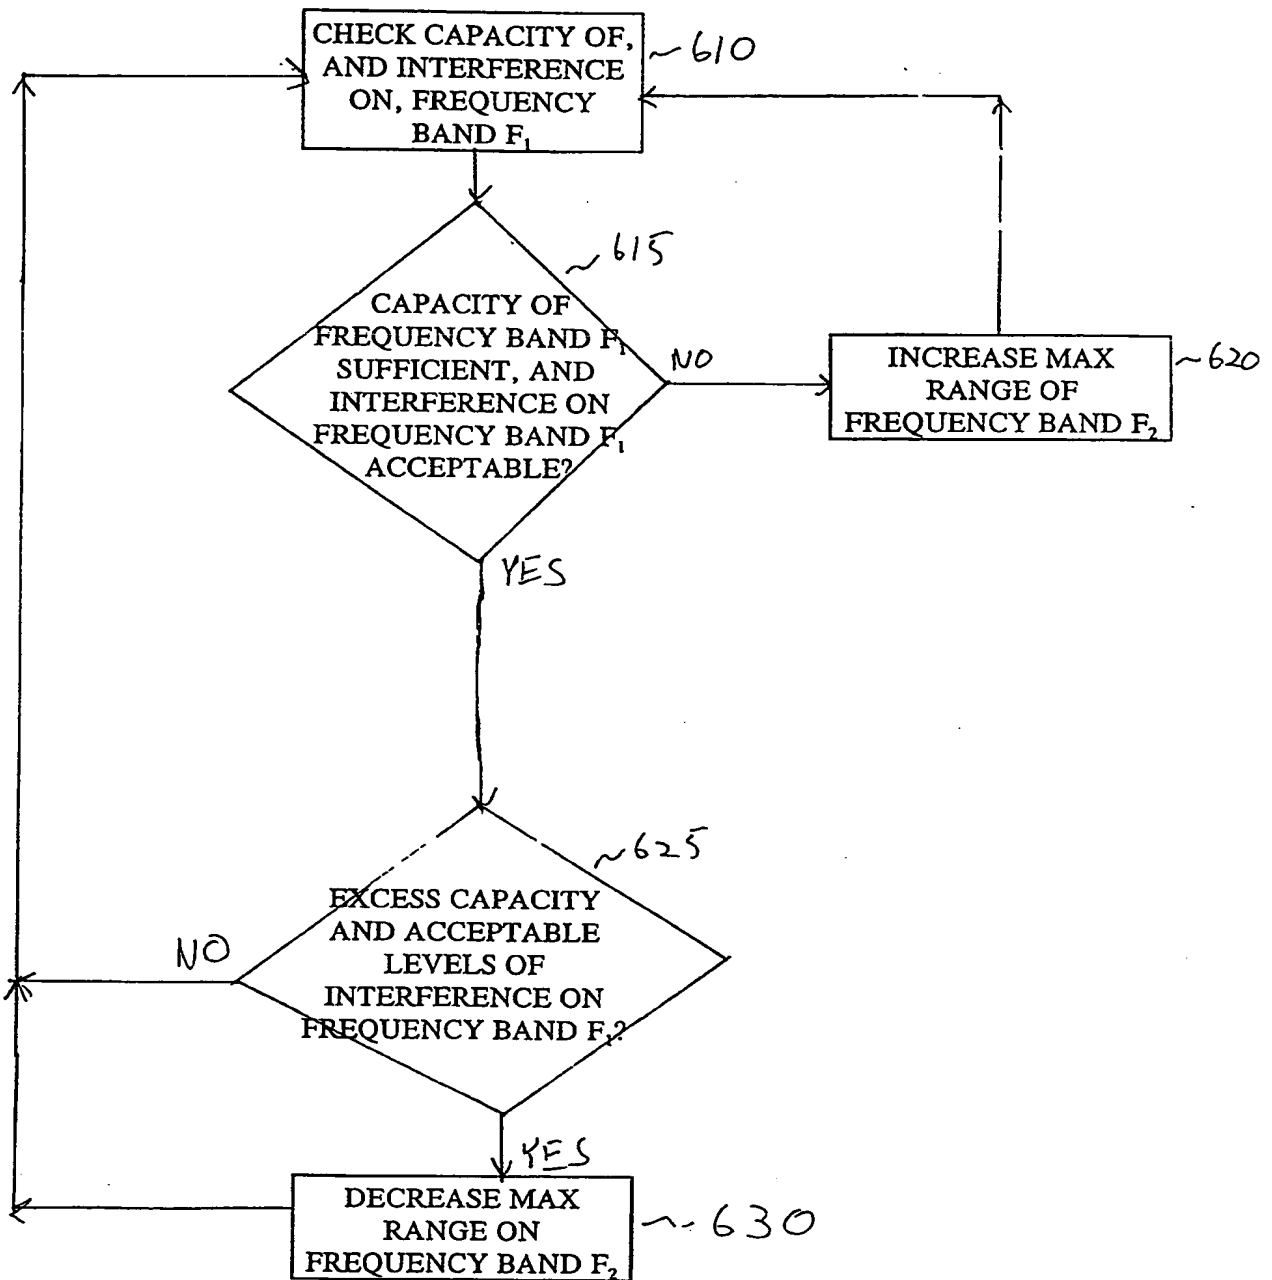


Figure 6

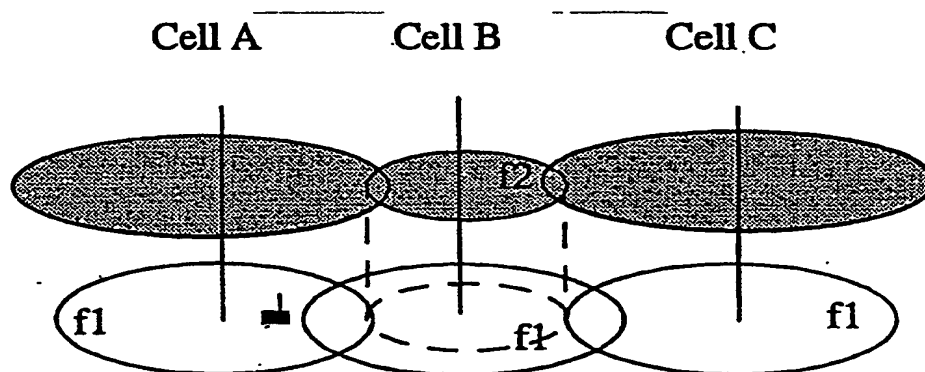


FIG 7

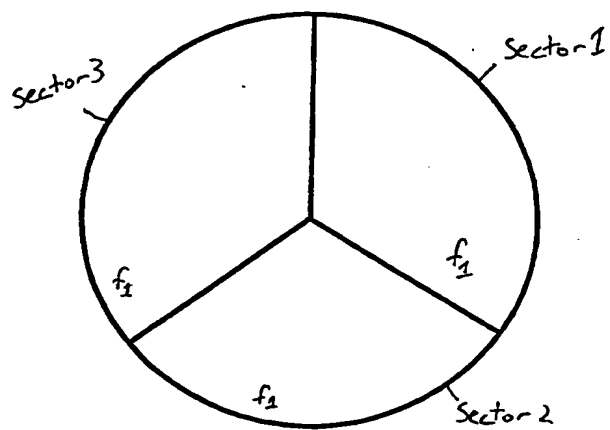


Figure 8A

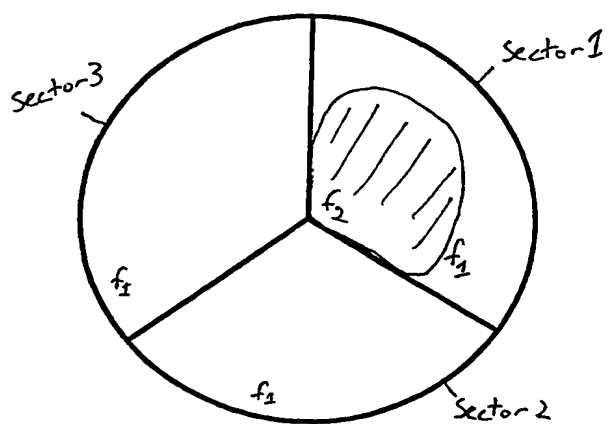


Figure 8B

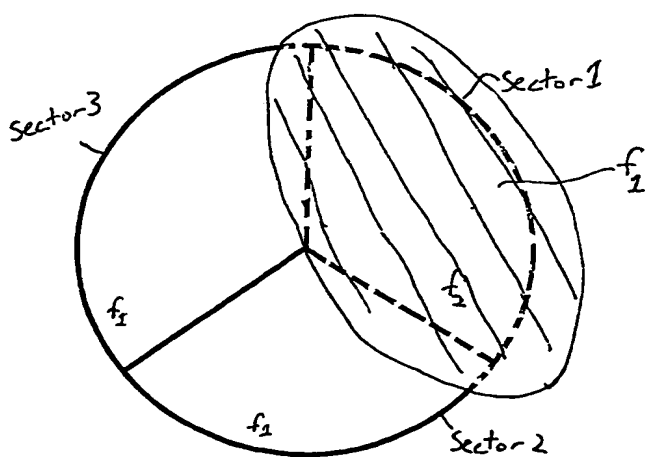


Figure 8C

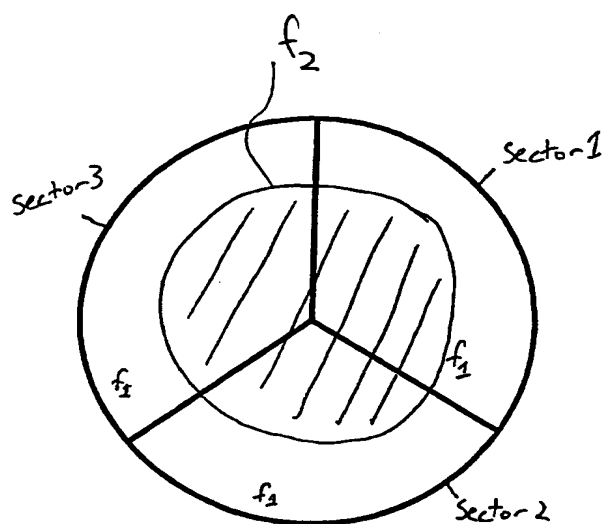


Figure 9

**THIS PAGE BLANK (USPTO)**